SKYPOWER

TRUCK & BUS RADIAL TYRES

SKYPOWER

CONTENT

SA31 — P01 — SA32
SA33 — P02 — SA34
SA35 — P03 — SA36
SA37 — P04 — SA39
SF11 — P05 — SF12
SF13 — P06 — SF15
SF16 — P07 — SF17
SF18 — P08 — SF19
SF21 — P09 — SF22
SF23 — P10 — SD52
SD53 — P11 — SD55
SD56 — P12 — SD57
SD58 — P13 — SD59
SD72 — P14 — SD75
SD76 — P15 — SD77
SD78 — P16 — SD79
SD81 — P17 — SD82
SD83 — P18 — SD85
SD86 — P19 — SD87
SD88 — P20 — SD89
SM96 — P21 — SM97
SM98 — P22 — SM99

SKYPOWER

SKYPOWER

TRUCK & BUS RADIAL TYRES

SA31

Regional&Urban Roads

Wear resistant | Tear resistant | Anti-puncture

- Excellent wear resistance, tear resistance and puncture resistance.
- Optimize structural design, better bearing performance, reduce heat generation, and extend service life.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
325/95R24	22	162/160	K	4750/4500	850	9. 00	325	17. 0
12. 00R24	22	162/160	K	4750/4500	850	8. 5	325	17. 0

SA32

Long Haul&Regional&Urban Roads

Tear resistant | Anti wet slip | Anti-puncture

- Strengthened carcess structure design,anti wear, impact and fatigue.
- Three-lined pattern and open shoulder design, excellent anti-slip and low heat build-up performance.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
315/80R22. 5	20	157/154	L	4125/3750	900	9. 00	312	17. 0
295/80R22. 5	18	152/149	L	3550/3250	900	9. 00	298	16. 5
12. 00R20	20	156/153	K	4000/3650	900	8. 5	315	17. 0
11. 00R20	18	152/149	K	3550/3250	930	8. 0	293	17. 0
10. 00R20	18	149/146	K	3200/3000	930	7. 5	278	16. 5
9. 00R20	16	144/142	K	2800/2650	900	7. 0	259	16. 0

SKYPOWER

SA33

Long Haul&Regional&Urban Roads

Wear resistant Anti wet slip Prevents uneven wear

- Excellent wear resistance, deepened pattern design, highly improve tire wear resistance.
- Shoulder pattern close design can effectively improve the eccentric wear problem and prolong the service life.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
12R22. 5	18	152/149	K	3550/3250	930	9. 00	300	19. 5

SA34

Long Haul&Regional &Urban Roads



Wear resistant Anti wet slip Anti-puncture

- Unique formula design provides tires with excellent puncture resistance, wet skid resistance and wear resistance.
- Optimize structural design, improve tire bearing capacity, reduce heat generation and increase service life.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
13R22. 5	18	154/151	L	3750/3450	830	9. 75	320	17. 5
12R22. 5	18	152/149	L	3550/3250	930	9. 00	300	17. 5
295/80R22. 5	18	152/149	L	3550/3250	900	9. 00	298	16. 5
315/80R22. 5	20	157/154	L	4125/3750	900	9. 00	312	17. 0
12. 00R20	20	156/153	K	4000/3650	900	8. 5	315	16. 5
11. 00R20	18	152/149	K	3550/3250	930	8. 0	293	16. 5
10. 00R20	18	149/146	K	3200/3000	930	7. 5	278	17. 0
9. 00R20	16	144/142	K	2800/2650	900	7. 0	259	16. 0

SA35

Long Haul&Regional&Urban Roads



Load-bearing type Tear resistant Anti-puncture

- Excellent load capacity, tear resistance, puncture resistance.
- Classic three-line pattern and open shoulder design for better heat dissipation.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
325/95R24	22	162/160	K	4750/4500	850	9. 00	325	16. 0
315/80R22. 5	20	157/154	K	4125/3750	900	9. 00	312	16. 5
11R22. 5	16	146/143	K	3000/2725	830	8. 25	279	14. 5
12. 00R24	22	162/160	K	4750/4500	850	8. 5	325	16. 0
12. 00R20	20	156/153	K	4000/3650	900	8. 5	315	16. 5
11. 00R20	18	152/149	K	3550/3250	930	8. 0	293	16. 0
10. 00R20	18	149/146	K	3250/3000	930	7. 5	278	15. 5
9. 00R20	16	144/142	K	2800/2650	900	7. 0	259	15. 0
8. 25R20	16	139/137	K	2430/2300	930	6. 5	236	13. 5
8. 25R16LT	16	128/124	K	1800/1600	770	6. 50H	235	13. 0
7. 50R16LT	16	125/121	K	1650/1450	870	6. 00G	215	12. 0
7. 00R16LT	14	118/114	K	1320/1180	770	5. 50F	200	12. 0
6. 50R16LT	12	110/105	K	1060/925	670	5. 50F	185	11. 5

SA36

Long Haul&Regional&Urban Roads

Tear resistant Anti wet slip Anti-puncture

- Strengthen the design of carcass structure to resist tearing and puncture.
- Three-thread pattern and open shoulder design, anti slippery, good heat dissipation.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
8. 25R16LT	18	132/128	K	2000/1800	870	6. 50H	235	15. 5
7. 50R16LT	16	125/121	K	1650/1450	870	6. 00G	215	15. 5
7. 00R16LT	14	118/114	K	1320/1180	770	5. 50F	200	12. 5

SA37

Long Haul&Regional&Urban Roads



Tear resistant | Anti wet slip | Anti-puncture

- Strengthened carcess structure design,anti wear, impact and fatigue.
- Three-lined pattern and open shoulder design, excellent anti-slip and low heat build-up performance.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
315/80R22. 5	20	157/154	L	4125/3750	900	9. 00	312	17. 0

SF11

Long Haul &Regional



Wear resistant | Anti wet slip | Fuel economical

- Excellent wear resistance performance, anti-slip, more comfortable.
- Excellent high-speed performance, low rolling resistance, fuel economical.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
295/80R22. 5	18	152/149	M	3550/3250	900	9. 00	298	17. 0
315/80R22. 5	20	157/154	M	4125/3750	900	9. 00	312	17. 0

SA39

Long Haul&Regional &Urban Roads



Wear resistant | Low heat build-up | Prevents uneven wear

- Excellent wear resistance, deepened pattern design, highly improve tire wear resistance.
- Shoulder pattern close design can effectively improve the eccentric wear problem and prolong the service life.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
12R22. 5	18	152/149	K	3550/3250	930	9. 00	300	19. 5

SF12

Long Haul&Regional&Urban Roads

Wear resistant | Anti wet slip | Comfort

- Excellent wear resistance and wet skid resistance.
- Excellent high-speed and comfortable performance.
- Low rolling resistance coefficient, less fuel consumption.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
7. 50R16LT	16	125/121	K	1650/1450	870	6. 00G	215	13. 0
7. 00R16LT	14	118/114	K	1320/1180	770	5. 50F	200	12. 5

SF13

Long Haul &Regional &Urban Roads



Wear resistant Anti wet slip Fuel economical

- Excellent wear resistance performance, anti-slip, more comfortable.
- Excellent high-speed performance, low rolling resistance, fuel economical.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
215/75R17. 5	18	135/133	M	2180/2060	860	6. 75	211	13. 0
235/75R17. 5	18	143/141	K	2725/2575	860	7. 50	233	13. 5

SF15

Long Haul &Regional

Wear resistant Tear resistant Low heat build-up

- Excellent wear resistance, tear resistance and low heat generation performance.
- Excellent structure design, ensuring the loading capacity & comfort performance, and preventing eccentric wear.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
385/65R22. 5	22	162	K	4750	900	11. 75	389	16. 0

SF16

Long Haul&Regional

Wear resistant Tear resistant Low heat build-up

- Excellent wear resistance, tear resistance and low heat generation performance.
- Excellent structure design, ensuring the loading capacity & comfort performance, and preventing eccentric wear.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
385/65R22. 5	22	162	K	4750	900	11. 75	389	16. 0

SF17

Long Haul&Regional



Wear resistant Tear resistant Low heat build-up

- Excellent wear resistance, tear resistance and reduce heat generation.
- Excellent structural design to ensure loading capacity and comfort, anti-eccentric wear.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
11R22. 5	18	149/146	M	3250/3000	930	8. 25	279	16. 0
11R24. 5	16	149/146	M	3250/3000	830	8. 25	279	16. 0
245/70R19. 5	18	141/140	L	2575/2500	930	7. 50	248	14. 0
245/70R17. 5	18	134/132	K	2120/2000	900	7. 50	248	14. 0
275/70R22. 5	16	144/141	M	2800/2575	830	8. 25	276	16. 5
275/80R22. 5	18	149/146	L	3250/3000	900	8. 25	276	15. 5

E

SF18

Long Haul&Regional &Urban Roads



Wear resistant Anti wet slip Load-bearing type

- Excellent wear and wet skid resistance.
- Excellent load capacity.
- Reinforced bead structure design provides excellent bead performance.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
265/70R19. 5	18	143/141	J	2725/2575	860	7. 50	262	13. 0
295/75R22. 5	16	146/143	M	3000/2725	830	9. 00	286	15. 0
315/70R22. 5	20	154/151	L	3750/3450	930	9. 00	312	15. 0
9. 5R17. 5	18	143/141	J	2725/2575	875	6. 75	240	13. 5

SF19

Long Haul &Regional&Urban Roads

Wear resistant Anti wet slip Comfort

- Excellent wear resistance and wet skid resistance.
- Excellent high-speed and comfortable performance.
- Low rolling resistance coefficient, less fuel consumption.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
12. 00R20	20	156/153	K	4000/3650	900	8. 5	315	16. 5
11. 00R20	18	152/149	K	3550/3250	930	8. 0	293	16. 0
10. 00R20	18	149/146	K	3250/3000	930	7. 5	278	15. 5
9. 00R20	16	144/142	K	2800/2650	900	7. 0	259	15. 0
8. 25R20	16	139/137	K	2430/2300	930	6. 5	236	14. 5
8. 25R16LT	16	128/124	K	1800/1600	770	6. 50H	235	13. 5
7. 50R16LT	16	125/121	K	1650/1450	870	6. 00G	215	13. 0
7. 00R16LT	14	118/114	K	1320/1180	770	5. 50F	200	12. 0

SF21

Long Haul&Regional&Urban Roads

Wear resistant Comfort Low heat build-up

- Excellent wear resistance, tear resistance and reduce heat generation.
- Excellent high-speed performance, durability and comfort.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
12R22. 5	18	152/149	K	3550/3250	930	9. 00	300	17. 5

SF22

Long Haul &Regional&Urban Roads



Wear resistant Comfort Low heat build-up

- Excellent wear resistance, tear resistance and reduce heat generation.
- Excellent high-speed performance, durability and comfort.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
12R22. 5	18	152/149	K	3550/3250	930	9. 00	300	19. 5

SF23

Long Haul&Regional

Wear resistant Low heat build-up Prevents uneven wear

- Excellent wear resistance, tear resistance and reduce heat generation.
- Excellent structural design to ensure loading capacity and comfort, anti-eccentric wear.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
295/60R22. 5	18	150/147	K	3350/3075	900	9. 00	292	16. 5

SD53

Long Haul&Regional &Urban Roads

Wear resistant Anti wet slip Drivability

- Widened contact area, provides stronger driving force and braking force.
- Open shoulder pattern design, low heat build-up.
- Excellent wear resistance performance, longer mileage.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
295/60R22. 5	18	150/147	K	3350/3075	900	9. 00	292	18. 0
12R22. 5	18	152/149	K	3550/3250	930	9. 00	300	20. 0

SD52

Long Haul&Regional&Urban Roads

Heat dissipation Braking performance Drivability

- Wider driving surface, stronger driving and braking force.
- Open shoulder pattern for better heat dissipation.
- Excellent wear and wet skid resistance.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
12R22. 5	18	152/149	K	3550/3250	930	9. 00	300	23. 0

SD55

Long Haul&Regional &Urban Roads

Wear resistant Anti wet slip Drivability

- Excellent wear resistance, highly improve tire wear resistance.
- Unique pattern design provides excellent wet skid resistance, strong braking and driving performance.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
11R22. 5	18	149/146	L	3250/3000	930	8. 25	279	24. 0
11R24. 5	16	149/146	L	3250/3000	830	8. 25	279	22. 0
295/75R22. 5	16	146/143	L	3000/2725	830	9. 00	286	20. 0

SD56

Regional & Urban Roads

Tear resistant | Load-bearing type | Drivability

- Excellent tear resistance and loading capacity.
- Optimum angle groove design can provide sufficient driving force, and maintain good handling performance.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
11R24. 5	16	149/146	L	3250/3000	830	8. 25	279	20. 0

E

SD58

Long Haul&Regional&Urban Roads

Wear resistant | Low heat build-up | Anti wet slip

- Excellent wear resistant & anti-slip performance, low heat build-up.
- Excellent anti-tear and impact and fatigue resistance performance.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
265/70R19. 5	18	143/141	J	2725/2575	860	7. 50	262	15. 0

E

SD57

Mixed Road

Tear resistant | Grip | Drivability

- Perfect cutting resistance and tear resistance.
- Excellent gripping and driving performance.
- Strong structure of carcass , improving bearing capacity.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
325/95R24	22	162/160	F	4750/4500	850	9. 00	325	20. 0
12. 00R24	22	162/160	F	4750/4500	850	8. 5	325	20. 0

SD59

Regional&Urban Roads

Load-bearing type | Tear resistant | Anti-puncture

- Excellent load capacity, tear resistance, puncture resistance.
- Optimized tire structure design, improved load performance for combined use of the tire.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
11R22. 5	18	149/146	M	3250/3000	930	8. 25	279	18. 0

SD72

Long Haul &Regional&Urban Roads

Wear resistant | Anti wet slip | Drivability

- Wider driving surface, stronger driving and braking force.
- Open shoulder pattern for better heat dissipation.
- Excellent wear and wet skid resistance.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
12R22. 5	18	152/149	K	3550/3250	930	9. 00	300	22. 0

SD75

Regional&Urban Roads

Anti-puncture | Anti wet slip | Load-bearing type

- Excellent puncture and wet skid resistance.
- Optimize tyre structure design to increase load capacity.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
12R22. 5	18	152/149	K	3550/3250	930	9. 00	300	22. 0

E

SD76

Long Haul&Regional&Urban Roads

Wear resistant | Low heat build-up | Tear resistant

- Excellent anti-wear and anti-tear performance, low heat build up.
- Excellent high speed performance and durability.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
315/70R22. 5	20	154/151	L	3750/3450	930	9. 00	312	20. 0

SD77

Regional&Urban Roads

Tear resistant | Load-bearing type | Anti-puncture

- Excellent bearing performance, tear resistance, puncture resistance.
- Optimized tire structure and improved the performance of dual installing.
- The driving performance is better during heavy loading with the speed of 70km/h or less.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
13R22. 5	18	154/151	K	3750/3450	830	9. 75	320	18. 5
12. 00R20	20	156/153	K	4000/3650	900	8. 5	315	19. 0
11. 00R20	18	152/149	K	3550/3250	930	8. 0	293	19. 0
10. 00R20	18	149/146	K	3250/3000	930	7. 5	278	18. 5
9. 00R20	16	144/142	K	2800/2650	900	7. 0	259	18. 0
8. 25R20	16	139/137	K	2430/2300	930	6. 5	236	16. 0
8. 25R16LT	16	128/124	K	1800/1600	770	6. 50H	235	14. 5
7. 50R16LT	16	125/121	K	1650/1450	870	6. 00G	215	14. 5
7. 00R16LT	14	118/114	K	1320/1180	770	5. 50F	200	14. 0
6. 50R16LT	12	110/105	K	1060/925	670	5. 50F	185	13. 5

SD78

Long Haul&Regional&Urban Roads

Wear resistant | Anti wet slip | Low heat build-up

- Excellent wear resistance, reduce heat generation, wet skid resistance.
- Excellent high-speed performance and durability.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
13R22. 5	18	154/151	K	3750/3450	830	9. 75	320	18. 0
12R22. 5	18	152/149	K	3550/3250	930	9. 00	300	18. 0
12. 00R20	20	156/153	K	4000/3650	900	8. 5	315	18. 0
11. 00R20	18	152/149	K	3550/3250	930	8. 0	293	18. 0
10. 00R20	18	149/146	K	3200/3000	930	7. 5	278	17. 0
9. 00R20	16	144/142	K	2800/2650	900	7. 0	259	16. 0

SD79

Regional&Urban Roads

Wear resistant | Anti-puncture | Load-bearing type

- Excellent load-carrying properties.
- Optimized tire structure design, improved load performance for combined use of the tire.
- Excellent tear resistance, puncture resistance and wear resistance.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
13R22. 5	18	154/151	K	3750/3450	830	9. 75	320	21. 0
12R22. 5	18	152/149	K	3550/3250	930	9. 00	300	19. 5
11R22. 5	18	149/146	K	3250/3000	930	8. 25	279	18. 0

SD81

Regional&Urban Roads

Load-bearing type | Tear resistant | Anti-puncture

- Enhanced loading performance, tear resistance, puncture resistance.
- Optimized tire structure and improved the performance of dual installing.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
12. 00R20	20	156/153	K	4000/3650	900	8. 5	315	19. 0
11. 00R20	18	152/149	K	3550/3250	930	8. 0	293	19. 0
10. 00R20	18	149/146	K	3250/3000	930	7. 5	278	18. 5

SD82

Regional&Urban Roads

Wear resistant | Anti wet slip | Drivability

- Enhanced loading performance, tear resistance, puncture resistance.
- Optimized tire structure and improved the performance of dual installing.
- The driving effect is better during heavy loading with the speed of 70km/h or less.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
12. 00R20	20	156/153	K	4000/3650	900	8. 5	315	22. 0
11. 00R20	18	152/149	K	3550/3250	930	8. 0	293	21. 0
10. 00R20	18	149/146	F	3200/3000	930	7. 5	278	20. 5
9. 00R20	16	144/142	F	2800/2650	900	7. 0	259	18. 0

SD83

Regional&Urban Roads

Load-bearing type | Tear resistant | Anti-puncture

- Enhanced loading performance, tear resistance, puncture resistance.
- Optimized tire structure and improved the performance of dual installing.
- The driving effect is better during heavy loading with the speed of 70km/h or less.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
12. 00R20	20	156/153	F	4000/3650	900	8. 5	315	19. 5
11. 00R20	18	152/149	F	3550/3250	930	8. 0	293	18. 5

SD85

Regional&Urban Roads

Load-bearing type | Tear resistant | Anti-puncture

- The grooves design vertically and horizontally providing strong traction.
- Excellent cutting resistance, puncture resistance and heavy loading capacity.
- The open shoulder and under shoulder grooves provide excellent heat dissipation performance.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
12. 00R20	20	156/153	J	4000/3650	900	8. 5	315	19. 0
11. 00R20	18	152/149	J	3550/3250	930	8. 0	293	18. 0

SD86

Long Haul&Regional &Urban Roads

Heat dissipation | Braking performance | Drivability

- Strong driving force and braking force.
- Open shoulder pattern, better heat dissipation performance .
- Excellent anti-wear and anti-slip performance.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
295/80R22. 5	18	152/149	L	3550/3250	900	9. 00	298	21. 5
315/80R22. 5	20	157/154	L	4125/3750	900	9. 00	312	21. 5

SD87

Regional &Urban Roads

Tear resistant | Load-bearing type | Drivability

- Excellent anti-tear performance and excellent loading capacity.
- Pattern groove adopt optimized angle design, provides powerful driving force as well as good handling.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
295/80R22. 5	18	152/149	K	3550/3250	900	9. 00	298	22. 0

SD88

Regional&Urban Roads

Wear resistant | Low heat build-up | Drivability

- Excellent driving force and anti-wear performance.
- Excellent durability, low heat dissipation and anti-wear performance.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
315/80R22. 5	20	157/154	J	4125/3750	900	9. 00	312	21. 0

SD89

Regional&Urban Roads

Wear resistant | Tear resistant | Drivability

- Excellent driving force and anti-wear performance.
- Excellent durability, low heat dissipation and anti-wear performance.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
12R22. 5	18	152/149	K	3550/3250	930	9. 00	300	18. 0

SM96

Non paved pavement in mining area

Load-bearing type | Tear resistant | Anti-puncture

- Excellent heavy-loading performance, better adapt to harsh road conditions.
- Special formula for mining to improve the performance of puncture resistance and tear resistance.
- The driving performance is better during heavy loading with the speed of 40km/h or less.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
12. 00R20	20	156/153	D	4000/3650	900	8. 5	315	23. 0
11. 00R20	18	152/149	D	3550/3250	930	8. 0	293	22. 5

SM97

Non paved pavement in mining area

Load-bearing type | Tear resistant | Anti-puncture

- Excellent heavy-loading performance, better adapt to harsh road conditions.
- Special formula for mining to improve the performance of puncture resistance and tear resistance .
- The driving performance is better during heavy loading with the speed of 40km/h or less.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
12. 00R20	20	156/153	D	4000/3650	900	8. 5	315	25. 0
11. 00R20	18	152/149	D	3550/3250	930	8. 0	293	24. 0
10. 00R20	18	149/146	D	3250/3000	930	7. 5	278	23. 0
9. 00R20	16	144/142	D	2800/2650	900	7. 0	259	22. 0
8. 25R20	16	139/137	D	2430/2300	930	6. 5	236	21. 5
8. 25R16LT	16	128/124	D	1800/1600	770	6. 50H	235	20. 5
7. 50R16LT	16	125/121	D	1650/1450	870	6. 00G	215	20. 0

SM98

Non paved pavement in mining area

Load-bearing type | Tear resistant | Anti-puncture

- Excellent heavy-loading performance, better adapt to harsh road conditions.
- Special formula for mining to improve the performance of puncture resistance and tear resistance.
- The driving performance is better during heavy loading with the speed of 40km/h or less.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
12. 00R20	20	156/153	D	4000/3650	900	8. 5	315	25. 0
11. 00R20	18	152/149	D	3550/3250	930	8. 0	293	24. 0

SM99

Non paved pavement in mining area

Load-bearing type | Tear resistant | Anti-puncture

- Excellent heavy-loading performance, better adapt to harsh road conditions.
- Special formula for mining to improve the performance of puncture resistance and tear resistance .
- The driving performance is better during heavy loading with the speed of 40km/h or less.

SIZE	PR	LOAD INDEX SINGLE / DUAL	SPEED INDEX	LOAD CAPACITY SINGLE / DUAL	PRESSURE KPA	STANDARD RIM INCH	SECTION WIDTH MM	TREAD DEPTH MM
12. 00R20	20	156/153	D	4000/3650	900	8. 5	315	25. 2
11. 00R20	18	152/149	D	3550/3250	930	8. 0	293	24. 0

TYRE SIZE DESIGNATION

265 / 70 R 19.5 18PR 143 / 141 J

- 265 — Section Width (mm)
- 70 — Aspect Ratio
- R — Radial Construction
- 19.5 — Rim Diameter (Inch)
- 18PR — Ply Rating
- 143 / 141 — Load Index
- J — Speed Symbols

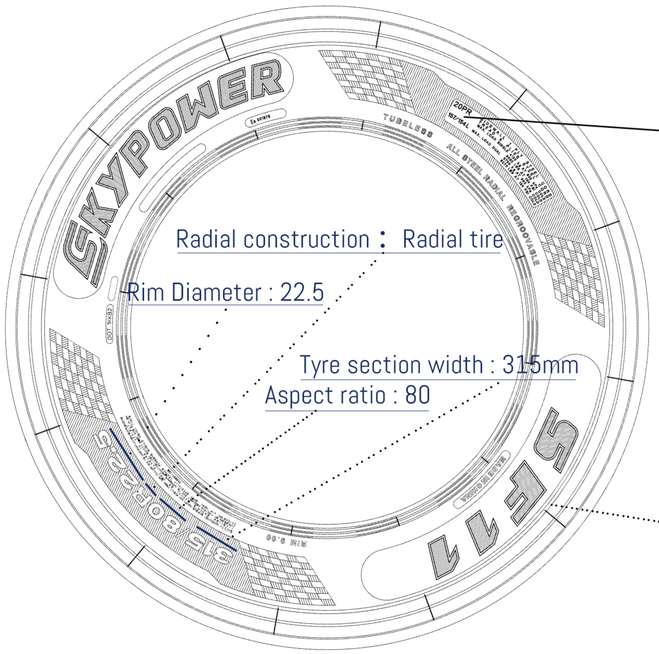

SKYPOWER

QINGDAO SKYPOWER TIRE TECHNOLOGY CO.,LTD

Website： www.skypowertire.com